


CLOU PELLET



AUSTROFLAMM



[www.austroflamm.com](http://www.austroflamm.com)

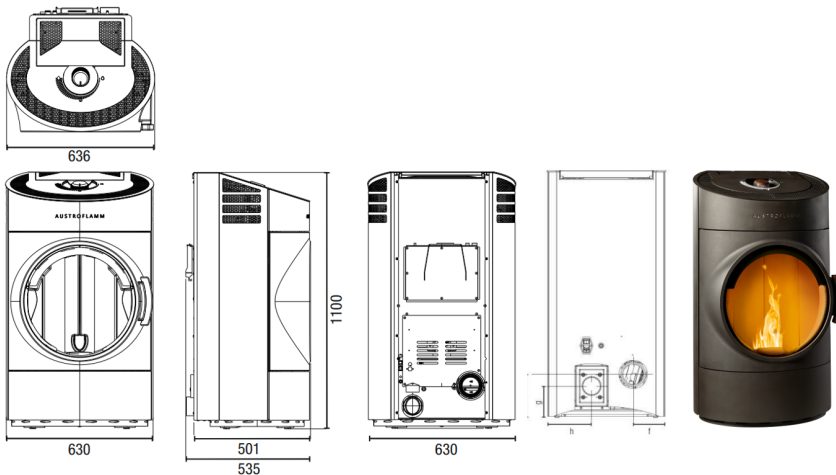

DIMENSIONS AND WEIGHTS		8 kW // 10 kW
Height x width x depth [mm]		1100 x 630 x 510
Flue pipe outlet, diameter [mm]		80
Outside air connection [Ø mm]		80
Weight [kg]		173
b: Connection height with flue pipe rear [mm]		183
f: Flue pipe connection from right [mm]		191
g: Connection height, outside air [mm]		97
h: Outside air connection from left [mm]		190
Firebox h x w x d [mm]		
Safety distances to combustible materials front / side / rear		800 / 100 / 100 // 1000 / 150 / 100
OUTPUT		
Nominal heat efficiency [kW] as per EN 14785		8 // 10
Min. / max. heat output [kW]		2.4-8.0 // 3.0-10.0
Min. / max. room-heating capacity [m³]		98-255 // 128-350
Pellet hopper [kg/l]		36/56
Min. / max. fuel consumption [kg/h]		0.6-1.87 // 0.71-2.36
Min. / max. burning time [h]		19-60 // 15-50
Power connection [V/Hz]		230/50
FITTINGS		
Room thermostat		o
(Weekly) timer		-
Automatic grate		-
Balanced flue		o
WLAN		Z
Remote control		-
Air distribution module		-
DATA FOR THE CHIMNEY SWEEP		
Flue gas mass flow [g/s] closed		5.51 // 6.18
Flue gas temperature [°C] closed		200 // 229
Minimum delivery pressure at nominal heat output [Pa] closed		12
Minimum delivery pressure for chimney calculation [Pa]		3